


#40

STRUCTURAL RIDGE CONNECTION

STUFF EXPOSED RIDGE W/ LVL BEVELED
BLOCKING MATERIAL. ATTACH LVL'S TO
EACH OTHER W/ COUNTER SUNK SIMPSON
SDWC15600 SCREWS @ 10" O.C.

SECURE OSB PANEL SKINS TO BEVELED
LVL MATERIAL W/ 0.131" DIA. x 2½"
LONG GALV. NAILS @ 4" O.C. OR EQU.
PRIOR TO CRANING INTO PLACE.

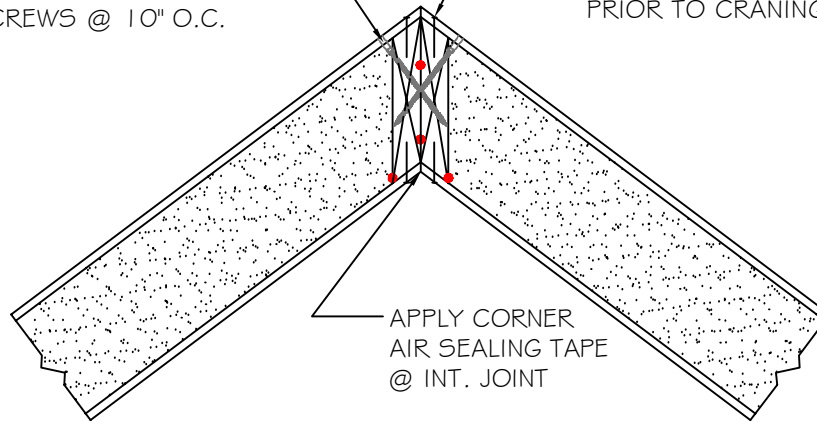


APPLY CORNER
AIR SEALING TAPE
@ INT. JOINT

NOTE: ALL RED DOTS - APPLY CONTINUOUS 3/8" DIA.
BEAD OF MASTIC SEALANT AT WOOD TO FOAM &
WOOD TO WOOD CONNECTIONS AT INTERIOR SIDE.

DETAILS ARE TYPICAL OF
STANDARD CONDITIONS AND
MAY NOT APPLY TO ALL
PROJECTS. REFER TO FINAL
PROJECT APPROVAL DRAWINGS
FOR SPECIFICATIONS. PLEASE
CONTACT FPI TECHNICAL
DEPARTMENT FOR QUESTIONS
AND/OR CONCERNS.

PANEL RIDGE CONNECTION DETAIL

SCALE: 1" = 1'-0"



Foard
PANEL

STRUCTURAL INSULATED PANELS
P.O. Box 185, 53 Slow Drive, W. Chesterfield, NH 03466

WWW.FOARDPANEL.COM

(800) - 644 - 8885